

Basic PDU

1U Horizontal Type Aluminium Frame PDU

3 x German Type (DIN 49440) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1100	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 3 x German Type (DIN 49440) Socket, 2m H05VV-F 3G1,5 mm ² black cord with DIN 49441 plug		482 X 44 X 44 mm
B-PDU-1101		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1102		1X16 A Circuit Breaker	482 X 44 X 44 mm



6 x German Type (DIN 49440) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1103	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 6 x German Type (DIN 49440) Socket, 2m H05VV-F 3G1,5 mm ² black cord with DIN 49441 plug		482 X 44 X 44 mm
B-PDU-1104		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1105		1X16 A Circuit Breaker	482 X 44 X 44 mm



3 x French Type (NF C 61314) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1106	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 3 x French Type Socket, 2m H05VV-F 3G1,5 mm ² black cord with DIN 49441 plug		482 X 44 X 44 mm
B-PDU-1107		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1108		1X16 A Circuit Breaker	482 X 44 X 44 mm



6 x French Type (NF C 61314) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1109	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 6 x French Type Socket, 2m H05VV-F 3G1,5 mm ² black cord with DIN 49441 plug		482 X 44 X 44 mm
B-PDU-1110		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1111		1X16 A Circuit Breaker	482 X 44 X 44 mm



1U Horizontal Type Aluminium Frame PDU

8 x German Type (DIN 49440) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1112	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 8 x German Type (DIN 49440) Socket, 2m H05VV-F 3G1,5 mm ² black cord with DIN 49441 plug		482 X 44 X 44 mm



8 x French Type (NF C 61314) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1113	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 8 x French Type Socket, 2m H05VV-F 3G1,5 mm ² black cord with DIN 49441 plug		482 X 44 X 44 mm



4 x UK Type (BS 1363) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1114	1 Phase 250 VAC Input IP20, 13 A, 2.8 Kw, 4 x UK Type (BS 1363) Socket, 2m H05VV-F 3G1,5 mm ² black cord with 13A fused BS 1363 plug		482 X 44 X 44 mm
B-PDU-1115		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1116		1X16 A Circuit Breaker	482 X 44 X 44 mm
B-PDU-1117		Surge Protection	482 X 44 X 44 mm
B-PDU-1118		On/off switch With Thermal Protection, Surge Protection, Line Filter	482 X 44 X 44 mm



6 x UK Type (BS 1363) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1119	1 Phase 250 VAC Input IP20, 13 A, 2.8 Kw, 6 x UK Type (BS 1363) Socket, 2m H05VV-F 3G1,5 mm ² black cord with 13A fused BS 1363 plug		482 X 44 X 44 mm
B-PDU-1120		16A On/Off Lighted Switch	482 X 44 X 44 mm



Basic PDU

1U Horizontal Type Aluminium Frame PDU

6 x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1121	1 Phase 250 VAC Input IP20, 10 A, 2.2 kW, 6 x IEC320 C13 Socket, 2m H05VV-F 3G1,0 mm ² black cord with IEC-C14 plug		482 X 44 X 44 mm
B-PDU-1122		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1123		1X16 A Circuit Breaker	482 X 44 X 44 mm
B-PDU-1124		On/off switch With Thermal Protection, Surge Protection, Line Filter	482 X 44 X 44 mm

8 x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1125	1 Phase 250 VAC Input IP20, 10 A, 2.2 kW, 8 x IEC320 C13 Socket, 2m H05VV-F 3G1,0 mm ² black cord with IEC-C14 plug		482 X 44 X 44 mm
B-PDU-1126		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1127		1X16 A Circuit Breaker	482 X 44 X 44 mm
B-PDU-1128		On/off switch With Thermal Protection, Surge Protection	482 X 44 X 44 mm
B-PDU-1129		Surge Protection, Line Filter	482 X 44 X 44 mm

10 x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1130	1 Phase 250 VAC Input IP20, 10 A, 2.2 kW, 10 x IEC320 C13 Socket, 2m H05VV-F 3G1,0 mm ² black cord with IEC-C14 plug		482 X 44 X 44 mm
B-PDU-1131		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1132		On/off switch With Thermal Protection	482 X 44 X 44 mm
B-PDU-1133		Surge Protection	482 X 44 X 44 mm

12 X IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1134	1 Phase 250 VAC Input IP20, 10 A, 2.2 kW, 12 X IEC320 C13 Socket, 2m H05VV-F 3G1,0 mm ² black cord with IEC-C14 plug		482 X 44 X 44 mm



1U Horizontal Type Aluminium Frame PDU

6 x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1135	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 6 x IEC320 C13 Socket, 2m H05VV-F 3G1,5 mm ² black cord with DIN 49441 plug		482 X 44 X 44 mm
B-PDU-1136		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1137		1X16 A Circuit Breaker	482 X 44 X 44 mm
B-PDU-1138		On/off switch With Thermal Protection, Surge Protection, Line Filter	482 X 44 X 44 mm

8 x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1139	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 8 x IEC320 C13 Socket, 2m H05VV-F 3G1,5 mm ² black cord with DIN 49441 plug		482 X 44 X 44 mm
B-PDU-1140		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1141		1X16 A Circuit Breaker	482 X 44 X 44 mm
B-PDU-1142		16A On/Off Lighted Switch, Surge Protection	482 X 44 X 44 mm
B-PDU-1143		Surge Protection, Line Filter	482 X 44 X 44 mm

10 x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1144	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 10 x IEC320 C13 Socket, 2m H05VV-F 3G1,5 mm ² black cord with DIN 49441 plug		482 X 44 X 44 mm
B-PDU-1145		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1146		On/off switch With Thermal Protection	482 X 44 X 44 mm
B-PDU-1147		Surge Protection	482 X 44 X 44 mm

12 x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1148	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 12 X IEC320 C13 Socket, 2m H05VV-F 3G1,5 mm ² black cord with DIN 49441 plug		482 X 44 X 44 mm



Basic PDU

1U Horizontal Type Aluminium Frame PDU

6 x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1149	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 6 x IEC320 C13 Socket, 2m H05VV-F 3G1,5 mm ² black cord with IEC-C20 Plug		482 X 44 X 44 mm
B-PDU-1150		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1151		1X16 A Circuit Breaker	482 X 44 X 44 mm
B-PDU-1152		On/off switch With Thermal Protection, Surge Protection, Line Filter	482 X 44 X 44 mm

8 x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1153	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 8 x IEC320 C13 Socket, 2m H05VV-F 3G1,5 mm ² black cord with IEC-C20 Plug		482 X 44 X 44 mm
B-PDU-1154		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1155		1X16 A Circuit Breaker	482 X 44 X 44 mm
B-PDU-1156		16A On/Off Lighted Switch, Surge Protection	482 X 44 X 44 mm
B-PDU-1157		Surge Protection, Line Filter	482 X 44 X 44 mm

10 x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1158	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 10 x IEC320 C13 Socket, 2m H05VV-F 3G1,5 mm ² black cord with IEC-C20 Plug		482 X 44 X 44 mm
B-PDU-1159		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1160		On/off switch With Thermal Protection	482 X 44 X 44 mm
B-PDU-1161		Surge Protection	482 X 44 X 44 mm

12 X IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1162	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 12 X IEC320 C13 Socket, 2m H05VV-F 3G1,5 mm ² black cord with IEC-C20 Plug		482 X 44 X 44 mm



1U Horizontal Type Aluminium Frame PDU

4 x IEC320 C19 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1163	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 4 x C19 Socket, 2m H05VV-F 3G1,5 mm ² black cord with IEC-C20 Plug		482 X 44 X 44 mm
B-PDU-1164		On/off switch With Thermal Protection	482 X 44 X 44 mm
B-PDU-1165		1X16 A Circuit Breaker	482 X 44 X 44 mm
B-PDU-1166		Surge Protection	482 X 44 X 44 mm
B-PDU-1167		On/off switch With Thermal Protection, Surge Protection, Line Filter	482 X 44 X 44 mm

6 x IEC320 C19 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1168	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 6 x C19 Socket, 2m H05VV-F 3G1,5 mm ² black cord with IEC-C20 Plug		482 X 44 X 44 mm
B-PDU-1169		On/off switch With Thermal Protection	482 X 44 X 44 mm

4 x IEC320 C13 Socket + 2 x IEC320 C19 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1170	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 4 x IEC320 C13 Socket + 2 x C19 Socket, 2m H05VV-F 3G1,5 mm ² black cord with IEC-C20 Plug		482 X 44 X 44 mm
B-PDU-1171		1X16 A Circuit Breaker	482 X 44 X 44 mm

6 x IEC320 C13 Socket + 2 x IEC320 C19 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1172	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 6 x IEC320 C13 Socket + 2 x C19 Socket, 2m H05VV-F 3G1,5 mm ² black cord with IEC-C20 Plug		482 X 44 X 44 mm
B-PDU-1173		16A On/Off Lighted Switch	482 X 44 X 44 mm
B-PDU-1174		Line Filter	482 X 44 X 44 mm
B-PDU-1175		16A On/Off Lighted Switch, Surge Protection	482 X 44 X 44 mm

8 x IEC320 C13 Socket + 2 x IEC320 C19 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-1176	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 8 x IEC320 C13 Socket + 2 x C19 Socket, 2m H05VV-F 3G1,5 mm ² black cord with IEC-C20 Plug		482 X 44 X 44 mm



Basic PDU

2U Horizontal Type Aluminium Frame PDU

9 x German Type (DIN 49440) Socket


PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-2000	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 9 x German Type (DIN 49440) Socket, 2m H05VV-F 3G1,5 mm ² black cord with DIN 49441 plug		482 X 44 X 88 mm
B-PDU-2001		16A On/Off Lighted Switch	482 X 44 X 88 mm
B-PDU-2002		1X16 A Circuit Breaker	482 X 44 X 88 mm
B-PDU-2003		16A On/Off Lighted Switch, Surge Protection	482 X 44 X 88 mm
B-PDU-2004		On/off switch With Thermal Protection, Surge Protection, Line Filter	482 X 44 X 88 mm

9 x French Type (NF C 61314) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-2005	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 9 x French Type Socket, 2m H05VV-F 3G1,5 mm ² black cord with DIN 49441 plug		482 X 44 X 88 mm
B-PDU-2006		16A On/Off Lighted Switch	482 X 44 X 88 mm
B-PDU-2007		1X16 A Circuit Breaker	482 X 44 X 88 mm
B-PDU-2008		16A On/Off Lighted Switch, Surge Protection	482 X 44 X 88 mm
B-PDU-2009		On/off switch With Thermal Protection, Surge Protection, Line Filter	482 X 44 X 88 mm

9 x UK Type (BS 1363) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-2010	1 Phase 250 VAC Input IP20, 13 A, 2.8 Kw, 9 x UK Type (BS 1363) Socket, 2m H05VV-F 3G1,5 mm ² black cord with 13A fused BS 1363 plug		482 X 44 X 88 mm
B-PDU-2011		16A On/Off Lighted Switch	482 X 44 X 88 mm
B-PDU-2012		1X16 A Circuit Breaker	482 X 44 X 88 mm
B-PDU-2013		16A On/Off Lighted Switch, Surge Protection	482 X 44 X 88 mm
B-PDU-2014		On/off switch With Thermal Protection, Surge Protection, Line Filter	482 X 44 X 88 mm

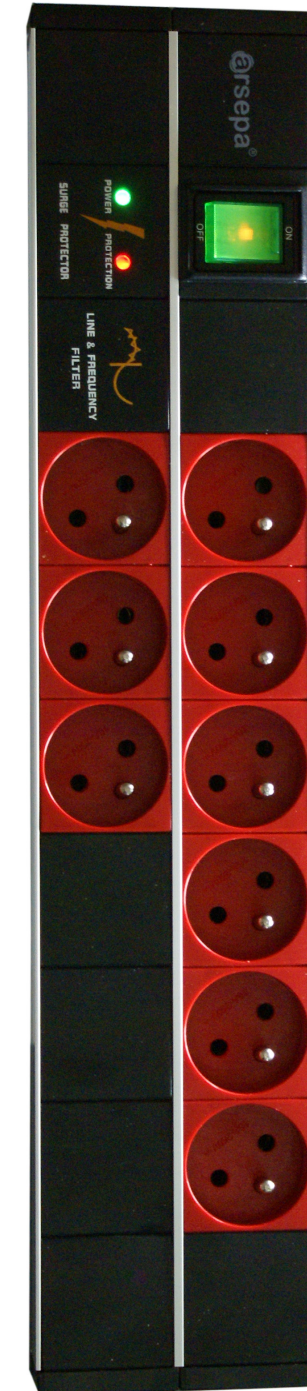

22U Vertical Type Aluminium Frame PDU

(6 + 6) x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0001-*	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 6 + 6 X IEC320 C13 Socket, 2X16A Circuit Breaker, 2m H05VV-F 3G1,5 mm ² black cord with IEC309-1P 16A plug	2X16A Circuit Breaker	978 X 44 X 44 mm

26U Vertical Type Aluminium Frame PDU

(6 + 6) x German Type (DIN 49440) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0002-*	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 6 + 6 x German Type (DIN 49440) Socket, 2X16A Circuit Breaker, 2m H05VV-F 3G1,5 mm ² black cord with IEC309-1P 16A plug	2X16A Circuit Breaker	1156 X 44 X 44 mm

(6 + 6) x French Type (NF C 61314) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0003-*	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 6 + 6 x French Type Socket, 2X16A Circuit Breaker, 2m H05VV-F 3G1,5 mm ² black cord with IEC309-1P 16A plug	2X16A Circuit Breaker	1156 X 44 X 44 mm

(6 + 6) x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0004-*	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 6 + 6 X IEC320 C13 Socket, 2X16A Circuit Breaker, 2m H05VV-F 3G1,5 mm ² black cord with IEC309-1P 16A plug	2X16A Circuit Breaker	1156 X 44 X 44 mm

(4 + 4) x IEC320 C13 Socket + (2 + 2) x IEC320 C19 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0005-*	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, (4 + 4)xIEC320 C13 Socket + (2 + 2)x C19 Socket, 2X16A Circuit Breaker, 2m H05VV-F 3G1,5 mm ² black cord with IEC309-1P 16A plug	2X16A Circuit Breaker	1156 X 44 X 44 mm

Optional: *=K (No Power Cable)



Basic PDU

32U Vertical Type Aluminium Frame PDU

(6 + 6) x German Type (DIN 49440) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0006-*	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 6 + 6 x German Type (DIN 49440) Socket, 2X16A Circuit Breaker, 2m H05VV-F 3G1,5 mm ² black cord with IEC309-1P 16A plug	2X16A Circuit Breaker	1422 X 44 X 44 mm

(6 + 6) x French Type (NF C 61314) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0007-*	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, 6 + 6 x French Type Socket, 2X16A Circuit Breaker, 2m H05VV-F 3G1,5 mm ² black cord with IEC309-1P 16A plug	2X16A Circuit Breaker	1422 X 44 X 44 mm

(4 + 4) x IEC320 C13 Socket+ (2 + 2) x IEC320 C19 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0008-*	1 Phase 250 VAC Input IP20, 16 A, 3.5 kW, (4 + 4)xIEC320 C13 Socket + (2 + 2)x C19 Socket, 2X16A Circuit Breaker, 2m H05VV-F 3G1,5 mm ² black cord with IEC309-1P 16A plug	2X16A Circuit Breaker	1422 X 44 X 44 mm

36U Vertical Type Aluminium Frame PDU

(6 + 6 + 6) x German Type (DIN 49440) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0009-**	3 Phase 400 VAC Input IP 20 , 16 A, 10.5 kW , (6 + 6 + 6) x German Type (DIN 49440) Socket, 3X16A Circuit Breaker, 2m 5x2,5 mm ² black cord with IEC309-3P 16A plug	3X16A Circuit Breaker	1600 X 44 X 44 mm

(6 + 6 + 6) x French Type (NF C 61314) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0010-**	3 Phase 400 VAC Input IP 20 , 16 A, 10.5 kW , (6 + 6 + 6) x French Type Socket, 3X16A Circuit Breaker, 2m 5x2,5 mm ² black cord with IEC309-3P 16A plug	3X16A Circuit Breaker	1600 X 44 X 44 mm

Optional: *=K (No Power Cable)

**=1K (No Power Cable + Single Phase Circuit)



36U Vertical Type Aluminium Frame PDU

(6 + 6 + 6) x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0011-**	3 Phase 400 VAC Input IP 20 , 16 A, 10.5 kW , (6 + 6 + 6) X IEC320 C13 Socket, 3X16 Circuit Breaker, 2m 5x2,5 mm ² black cord with IEC309-3P 16A plug	3X16A Circuit Breaker	1600 X 44 X 44 mm

(4 + 4 + 4) x IEC320 C13 Socket + (2 + 2 + 2) x IEC320 C19 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0012-**	3 Phase 400 VAC Input IP 20 , 16 A, 10.5 kW , (4+4+4)xIEC320 C13 Socket + (2+2+2)x C19 Socket, 3X16 Circuit Breaker, 2m 5x2,5 mm ² black cord with IEC309-3P 16A plug	3X16A Circuit Breaker	1600 X 44 X 44 mm

42U Vertical Type Aluminium Frame PDU

(6 + 6 + 6) x German Type (DIN 49440) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0013-**	3 Phase 400 VAC Input IP 20 , 16 A, 10.5 kW , (6 + 6 + 6) x German Type (DIN 49440) Socket, 3X16 Circuit Breaker, 2m 5x2,5 mm ² black cord with IEC309-3P 16A plug	3X16A Circuit Breaker	1867 X 44 X 44 mm

(6 + 6 + 6) x French Type (NF C 61314) Socket


PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0014-**	3 Phase 400 VAC Input IP 20 , 16 A, 10.5 kW , (6 + 6 + 6) x French Type Socket, 3X16 Circuit Breaker, 2m 5x2,5 mm ² black cord with IEC309-3P 16A plug	3X16A Circuit Breaker	1867 X 44 X 44 mm

(6 + 6 + 6) x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0015-**	3 Phase 400 VAC Input IP 20 , 16 A, 10.5 kW , (6 + 6 + 6) X IEC320 C13 Socket, 3X16 Circuit Breaker, 2m 5x2,5 mm ² black cord with IEC309-3P 16A plug	3X16A Circuit Breaker	1867 X 44 X 44 mm

Optional: *=K (No Power Cable)

**=1K (No Power Cable + Single Phase Circuit)

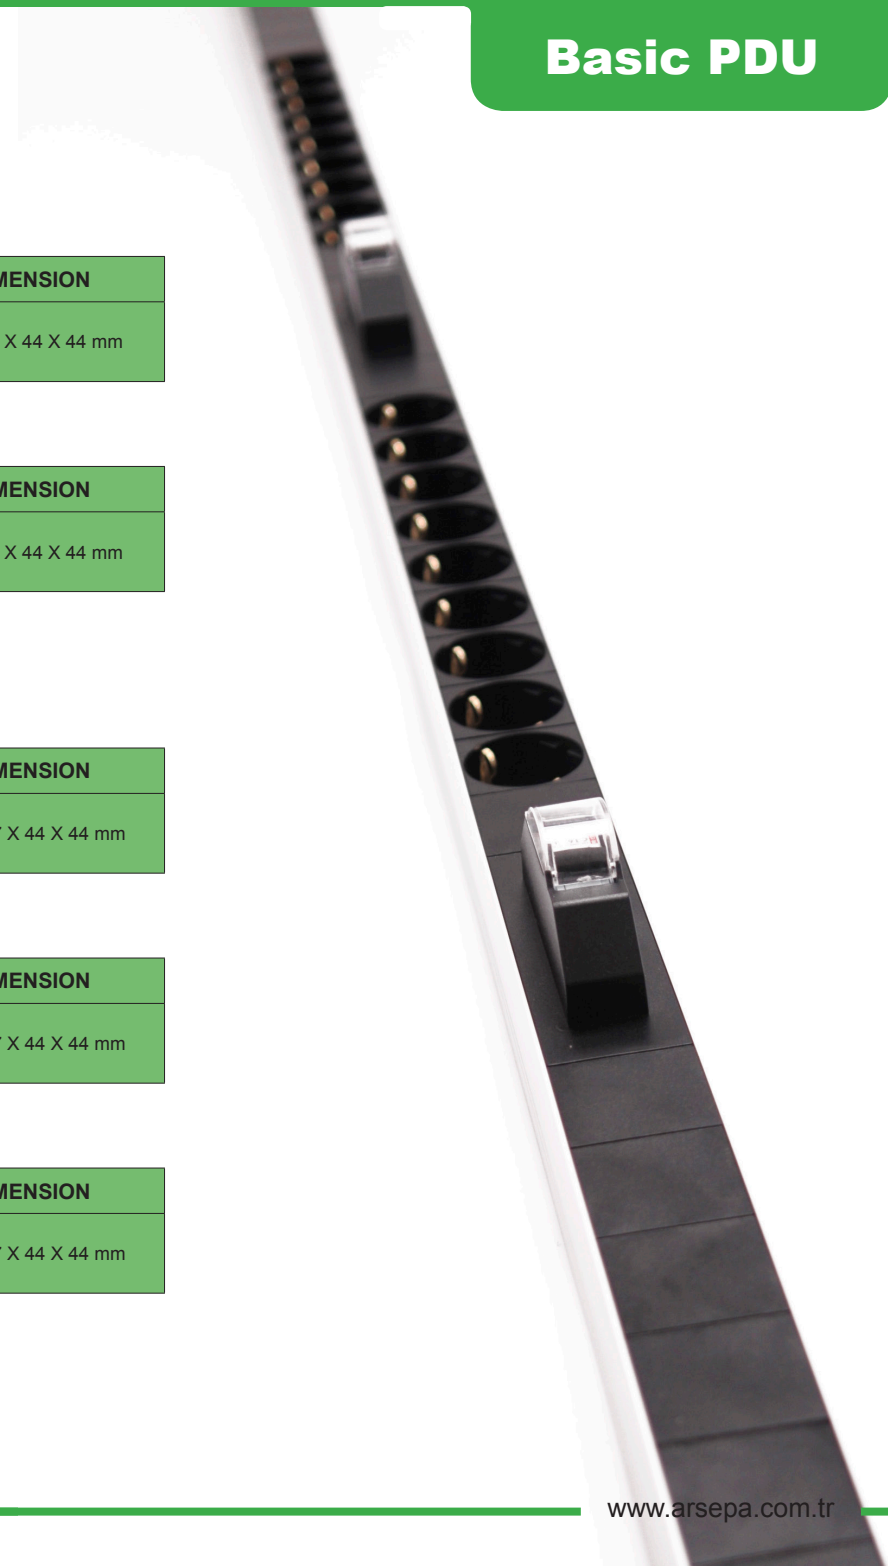

Basic PDU

42U Vertical Type Aluminium Frame PDU

(4+4+4) x IEC320 C13 Socket + (2+2+2) x IEC320 C19 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0016-**	3 Phase 400 VAC Input IP 20 , 16 A, 10.5 kW , (4+4+4)xIEC320 C13 Socket + (2+2+2)x C19 Socket, 3X16 Circuit Breaker, 2m 5x2,5 mm ² black cord with IEC309-3P 16A plug	3X16A Circuit Breaker	1867 X 44 X 44 mm

(8 + 8 + 8) x German Type (DIN 49440) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0017-**	3 Phase 400 VAC Input IP 20 , 32 A, 21 kW , (8 + 8 + 8) x German Type (DIN 49440) Socket, 3X32A Circuit Breaker, 2m 5x4 mm ² black cord with IEC309-3P 32A plug	3X32A Circuit Breaker	1867 X 44 X 44 mm

(8 + 8 + 8) x French Type (NF C 61314) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0018-**	3 Phase 400 VAC Input IP 20 , 32 A, 21 kW , (8 + 8 + 8) x French Type Socket, 3X32A Circuit Breaker, 2m 5x4 mm ² black cord with IEC309-3P 32A plug	3X32A Circuit Breaker	1867 X 44 X 44 mm

(8 + 8 + 8) x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0019-**	3 Phase 400 VAC Input IP 20 , 32 A, 21 kW , (8 + 8 + 8) X IEC320 C13 Socket, 3X32A Circuit Breaker, 2m 5x4 mm ² black cord with IEC309-3P 32A plug	3X32A Circuit Breaker	1867 X 44 X 44 mm

(6 + 6 + 6) x IEC320 C13 Socket + (2 + 2 + 2) x IEC320 C19 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0020-**	3 Phase 400 VAC Input IP 20 , 32 A, 21 kW , (6 + 6 + 6) X IEC320 C13 Socket + (2+2+2) x C19 Socket, 3X32A Circuit Breaker, 2m 5x4 mm ² black cord with IEC309-3P 32A plug	3X32A Circuit Breaker	1867 X 44 X 44 mm



Optional: *=K (No Power Cable)
 **=1K (No Power Cable + Single Phase Circuit)

45U Vertical Type Aluminium Frame PDU

(8 + 8 + 8) x German Type (DIN 49440) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0021-**	3 Phase 400 VAC Input IP 20 , 32 A, 21 kW , (8 + 8 + 8) x German Type (DIN 49440) Socket, 3X32A Circuit Breaker, 2m 5x4 mm ² black cord with IEC309-3P 32A plug	3X32A Circuit Breaker	2000 X 44 X 44 mm

(8 + 8 + 8) x French Type (NF C 61314) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0022-**	3 Phase 400 VAC Input IP 20 , 32 A, 21 kW , (8 + 8 + 8) x French Type Socket, 3X32A Circuit Breaker, 2m 5x4 mm ² black cord with IEC309-3P 32A plug	3X32A Circuit Breaker	2000 X 44 X 44 mm

(8 + 8 + 8) x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0023-**	3 Phase 400 VAC Input IP 20 , 32 A, 21 kW , (8 + 8 + 8) X IEC320 C13 Socket, 3X32A Circuit Breaker, 2m 5x4 mm ² black cord with IEC309-3P 32A plug	3X32A Circuit Breaker	2000 X 44 X 44 mm

(6 + 6 + 6) x IEC320 C13 Socket + (2 + 2 + 2) x IEC320 C19 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0024-**	3 Phase 400 VAC Input IP 20 , 32 A, 21 kW , (6 + 6 + 6) X IEC320 C13 Socket + (2+2+2) x C19 Socket, 3X32A Circuit Breaker, 2m 5x4 mm ² black cord with IEC309-3P 32A plug	3X32A Circuit Breaker	2000 X 44 X 44 mm



Optional: *=K (No Power Cable)

**=1K (No Power Cable + Single Phase Circuit)

Basic PDU

47U Vertical Type Aluminium Frame PDU

(8 + 8 + 8) x German Type (DIN 49440) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0025-**	3 Phase 400 VAC Input IP 20 , 32 A, 21 kW , (8 + 8 + 8) x German Type (DIN 49440) Socket, 3X32A Circuit Breaker, 2m 5x4 mm ² black cord with IEC309-3P 32A plug	3X32A Circuit Breaker	2000 X 44 X 44 mm

(8 + 8 + 8) x French Type (NF C 61314) Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0026-**	3 Phase 400 VAC Input IP 20 , 32 A, 21 kW , (8 + 8 + 8) x French Type Socket, 3X32A Circuit Breaker, 2m 5x4 mm ² black cord with IEC309-3P 32A plug	3X32A Circuit Breaker	2000 X 44 X 44 mm

(8 + 8 + 8) x IEC320 C13 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0027-**	3 Phase 400 VAC Input IP 20 , 32 A, 21 kW , (8 + 8 + 8) X IEC320 C13 Socket, 3X32A Circuit Breaker, 2m 5x4 mm ² black cord with IEC309-3P 32A plug	3X32A Circuit Breaker	2090 X 44 X 44 mm

(6 + 6 + 6) x IEC320 C13 Socket + (2+2+2) x IEC320 C19 Socket

PRODUCT CODE	PRODUCT DESCRIPTION	OPTIONS	DIMENSION
B-PDU-0028-**	3 Phase 400 VAC Input IP 20 , 32 A, 21 kW , (6 + 6 + 6) X IEC320 C13 Socket + (2+2+2) x C19 Socket, 3X32A Circuit Breaker, 2m 5x4 mm ² black cord with IEC309-3P 32A plug	3X32A Circuit Breaker	2090 X 44 X 44 mm

Optional: *=K (No Power Cable)
 **=1K (No Power Cable + Single Phase Circuit)

